

HOSHIZAKI

DCM-500B_H-OS/SD450 4/04
Item # 13147

DCM-500B_H-OS/SD-450 SERIES
SANITARY CUBELET ICEMAKER/DISPENSER



DCM-500BAH-OS
Air-Cooled
DCM-500BWH-OS
Water-Cooled
SD-450
For DCM-500



DCM-500B_H-OS


- CleanCycle 12®- Every 12 hours unit performs a 15-minute purge to rid itself of impurities
- LED Remote sensor for hands-free operation
- Corrosion resistant stainless steel exterior
- Hands-free operation reduces the risk of second-hand contamination
- Sealed LED housing prevents moisture from entering, thus eliminating the possibility of an electrical short
- Up to 567 lbs. of ice production per 24 hours, with 40 lbs. built-in storage
- Dispenses ice and water
- Self contained design reducing opportunities for cross contamination
- Easy to chew, cubelet ice
- Removable air filters

SD-450 Stand


- Heavy duty stand for floor model icemaker/dispenser
- Corrosion resistant stainless steel exterior
- Easy cleaning with attractive appearance

DCM-500BAH-OS on an optional SD-450


• Installation of Opti-Serve in a sunlit area may cause improper operation.




DCM-500
Countertop



DCM-500
Countertop with
optional 6" legs



DCM-500
Floor Model with
optional stand



SD-450
optional stand

ICEMAKER DIMENSION

Width x Depth x Height

DCM-500
26 x 22¹/₂ x 40"

DCM-500 w/ legs*
26 x 22¹/₂ x 46"

DIMENSION BY BIN SIZE

Width x Depth x Height

DCM-500 w/ stand*
26 x 22¹/₂ x 72¹/₂"

SD-450 Stand
26¹/₄ x 22 x 32¹/₂"

* Optional Items



Reliability is a beautiful thing™

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

1-800-438-6087


FAX 1-800-345-1325

TEL 770-487-2331

www.hoshizaki.com

SANITARY CUBELET ICEMAKER/DISPENSER

- DCM-500BAH-OS** (AIR-COOLED)
- DCM-500BWH-OS** (WATER-COOLED)
- SD-450** (FOR DCM-500)



- Up to 567 lbs. of ice production per 24 hours, with 40 lbs. of built-in ice storage
- Dispenses ice and water



WARRANTY TWO YEAR - Parts & labor on entire machine. FIVE YEAR - Parts on: Compressor, Air-Cooled Condenser.	STAINLESS STEEL INTERNAL AUGER	SERVICE Panels easily removed and all components accessible for service. Removable/cleanable air filters.
	R-404 REFRIGERANT	






Warranty valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact Factory for Warranty in other Countries.

OPERATING LIMITS Ambient Temp Range 45 - 100°F Water Temp Range 45 - 90°F Voltage Range 104 - 127V Water Pressure 10 - 113 psig	ELECTRICAL & PLUMBING 115/60/1 20 amp Max Fuse Size 1/2" OD copper or equivalent independent water supply 3/4" independent drain connection	STORAGE BIN Built-in 40 lb. capacity	THERMAL RELAY protects gear motor from overload
Clean Cycle 12* : 15 minute purge every 12 hours		MACHINE STAND Optional SD-450	GEAR MOTOR runs two minutes after termination of icemaking to clear all ice from evaporator



AIR - COOLED				
Water Temp ° F.	50°	70°	90°	
Air Temp ° F.	70°	525	510	485
	80°	461	438	416
	90°	396	385	358
WATER - COOLED				
Water Temp ° F.	50°	70°	90°	
Air Temp ° F.	70°	567	549	539
	80°	529	519	509
	90°	500	495	481

UTILITY CONSUMPTION				
Model Number	Approximate Electrical		KWH per 100 lbs.	
	90/70	70/50	90/70	70/50
DCM-500BAH-OS	1055W	985W	6.6	4.4
DCM-500BWH-OS	930W	985W	4.8	4.0

SPECIFICATIONS					
Model Number	Condenser	Amperage	Min Circuit Ampacity	Shipping Weight	
DCM-500BAH-OS	Air-Cooled	12	20	290 lbs.	
DCM-500BWH-OS	Water-Cooled	11.5	20	290 lbs.	
SD-450	N/A	N/A	N/A	110 lbs.	

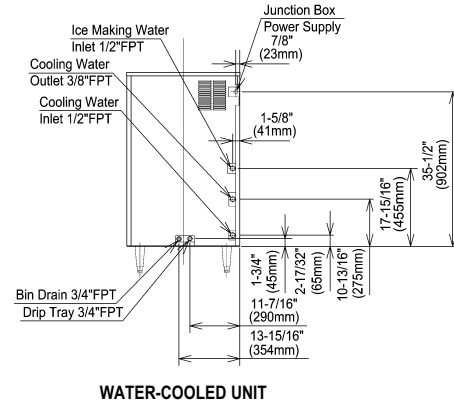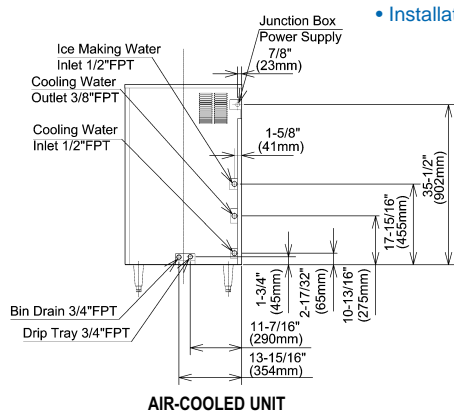

• Installation of Opti-Serve in a sunlit area may cause improper operation.

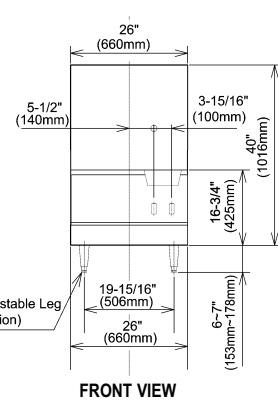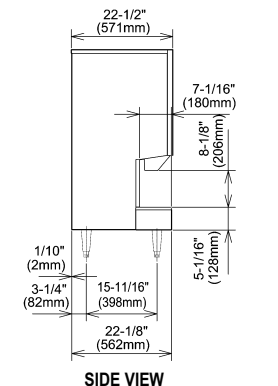

We reserve the right to change specifications without notice.

© HOSHIZAKI AMERICA, INC.