

HOSHIZAKI

DCM-750B_H-OS/SD700 4/04
Item # 13150

DCM-750B_H-OS/SD-700 SERIES

SANITARY CUBELET OPTISERVE ICEMAKER/DISPENSER



DCM-750BAH-OS

(OptiServe Dispenser)
Air-Cooled

DCM-750BWH-OS

(OptiServe Dispenser)
Water-Cooled

SD-700

(Optional Stand)
For DCM-750

DCM-750B_H-OS




- CleanCycle 12® Every 12 hours unit performs a 15-minute purge to rid itself of impurities
- LED Remote sensor for hands-free operation
- Corrosion resistant stainless steel exterior
- Hands-free operation reduces the risk of second-hand contamination
- Completely sealed LED housing, reduces the possibility of electrical short caused by moisture
- Up to 803 lbs. of ice production per 24 hours, with 95 lbs. built-in storage
- Dispenses ice and water
- Self contained design reduces opportunities for cross contamination
- Easy to chew, cubelet ice
- Removable air filters (air cooled models only)


SD-700 Stand

- Heavy duty stand for floor model icemaker/dispenser
- Corrosion resistant stainless steel exterior
- Easy cleaning with attractive appearance


DCM-750BAH-OS
on an
optional SD-700 stand




DCM-750
Countertop



DCM-750
Countertop with
optional 6" legs

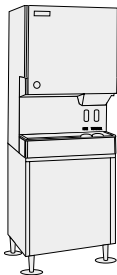

DCM-750
Floor Model with
optional stand



SD-700
Optional stand

DIMENSION BY BIN SIZE

Width x Depth x Height

DCM-750 w/o legs

34¹/₁₆ x 28¹/₂ x 48¹/₁₆"

DCM-750 w/ legs*

34¹/₁₆ x 28¹/₂ x 54¹/₁₆"

DCM-750 w/ stand*

34¹/₁₆ x 28¹/₂ x 80¹/₂"

SD-700 Stand

34¹/₄ x 28¹/₄ x 32¹/₂"

* Optional Items

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

1-800-438-6087

FAX 1-800-345-1325

TEL 770-487-2331

www.hoshizaki.com




Reliability is a
beautiful thing™

SANITARY CUBELET OPTISERVE ICEMAKER/DISPENSER



- DCM-750BAH-OS** (AIR-COOLED)
- DCM-750BWH-OS** (WATER-COOLED)
- SD-700** (OPTIONAL STAND FOR DCM-750)



- Up to 803 lbs. of ice production per 24 hours
- 95 lbs. of built-in ice storage
- Dispenses ice and water

WARRANTY TWO YEAR - Parts & labor on entire machine. FIVE YEAR - Parts on: Compressor, Air-Cooled Condenser.	STAINLESS STEEL INTERNAL AUGER	SERVICE Panels easily removed and all components accessible for service. Removable/cleanable air filters.
	R-404 REFRIGERANT	





Warranty valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact Factory for Warranty in other Countries.

OPERATING LIMITS Ambient Temp Range 45 - 100°F Water Temp Range 45 - 90°F Voltage Range 104 - 127V Water Pressure 10 - 113 psig	ELECTRICAL 115/60/1 20 amp Max Fuse Size/HACR Breaker Size	STORAGE BIN Built-in 95 lb. capacity	FUSE & THERMAL PROTECTOR - prevents gear from overloading
Clean Cycle 12 ®: 15 minute purge every 12 hours		MACHINE STAND Optional SD-700	GEAR MOTOR - runs one minute after termination of icemaking to clear all ice from evaporator


AIR - COOLED				
Water Temp ° F.	50°	70°	90°	
Air Temp ° F.	70°	803	770	726
	80°	684	645	608
	90°	573	567	509
WATER - COOLED				
Water Temp ° F.	50°	70°	90°	
Air Temp ° F.	70°	744	719	708
	80°	696	684	673
	90°	662	654	640

UTILITY CONSUMPTION				
Model Number	Approximate Electrical		KWH per 100 lbs.	
	90/70	70/50	90/70	70/50
DCM-750BAH-OS	1481W	1449W	6.3	4.3
DCM-750BWH-OS	1383W	1410W	5.1	4.5


SPECIFICATIONS				
Model Number	Condenser	Amperage	Min Circuit Ampacity	Shipping Weight
DCM-750BAH-OS	Air-Cooled	20.4	20	420 lbs.
DCM-750BWH-OS	Water-Cooled	16.3	20	420 lbs.
SD-700	N/A	N/A	N/A	165 lbs.

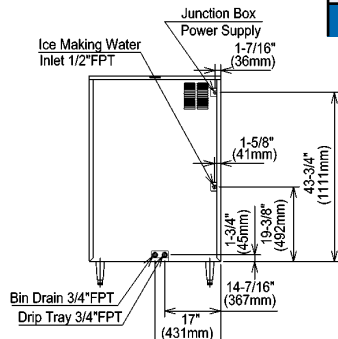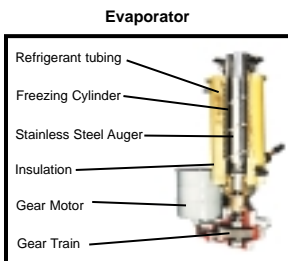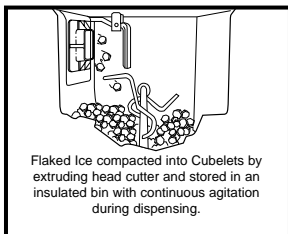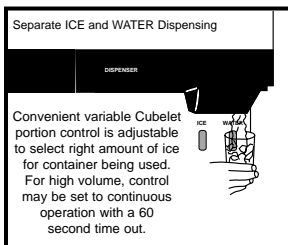


AIR-COOLED UNIT

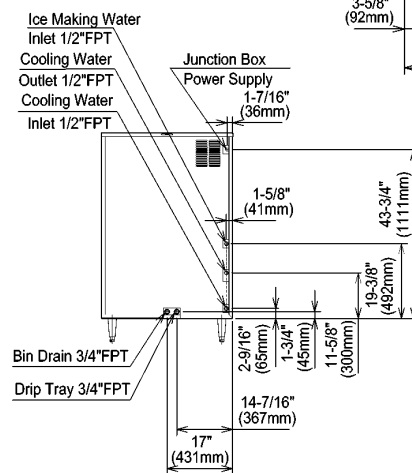

WATER-COOLED UNIT

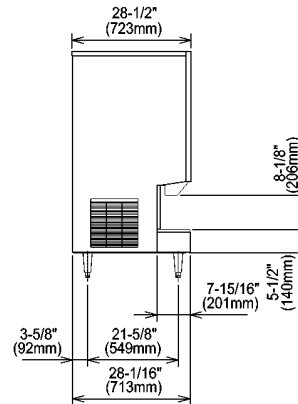

SIDE VIEW

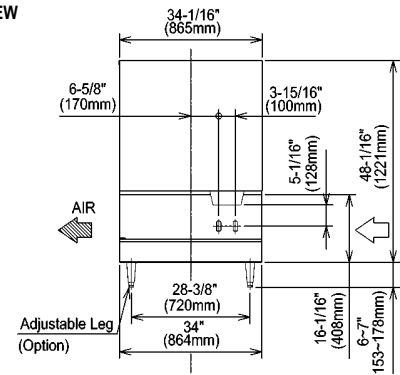

FRONT VIEW

We reserve the right to change specifications without notice.