

HOSHIZAKI




DCM-750BAF
on an
optional SD-700 stand


DCM-750BAF
Air-Cooled
DCM-750BWF
Water-Cooled
SD-700
For DCM-750




DCM-750
Countertop



DCM-750
Countertop with
optional 6" legs



DCM-750
Floor Model with
optional stand



SD-700
Optional stand

DCM-750B_F



- CleanCycle 12®
- Every 12 hours unit performs a 15-minute purge to rid itself of impurities
- Up to 803 lbs. of ice production per 24 hours, with 95 lbs. built-in storage
- Dispenses ice and water
- Self contained design reduces opportunities for cross contamination
- Easy to chew, cubelet ice
- Removable air filters

SD-700 Stand

- Heavy duty stand for floor model icemaker/dispenser
- Corrosion resistant stainless steel exterior
- Easy cleaning with attractive appearance

DIMENSION BY BIN SIZE

Width x Depth x Height

DCM-750 w/o legs
34 1/16" X 28 1/2" X 48 1/16"

DCM-750 w/ legs*
34 1/16" X 28 1/2" X 54 1/16"

DCM-750 w/ stand*
34 1/16" X 28 1/2" X 80 1/2"

SD-700 Stand
34 1/4" X 28 1/4" X 32 1/2"

* Optional Items



Reliability is a beautiful thing™

SANITARY CUBELET ICEMAKER/DISPENSER



- DCM-750BAF** (AIR-COOLED)
- DCM-750BWF** (WATER-COOLED)
- SD-700** (FOR DCM-750)

- Up to 803 lbs. of ice production per 24 hours
- 95 lbs. of built-in ice storage
- Dispenses ice and water

WARRANTY TWO YEAR - Parts & labor on entire machine. FIVE YEAR - Parts on: Compressor, Air-Cooled Condenser.	STAINLESS STEEL INTERNAL AUGER	SERVICE Panels easily removed and all components accessible for service. Removable/cleanable air filters.
	R-404 REFRIGERANT	

Warranty valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact Factory for Warranty in other Countries.











OPERATING LIMITS Ambient Temp Range 45 - 100°F Water Temp Range 45 - 90°F Voltage Range 104 - 127V Water Pressure 10 - 113 psig	ELECTRICAL 115/60/1 20 amp Max Fuse Size/HACR Breaker Size	STORAGE BIN Built-in 95 lb. capacity	THERMAL RELAY protects gear motor from overload GEAR MOTOR runs two minutes after termination of icemaking to clear all ice from evaporator
Clean Cycle 12 ®: 15 minute purge every 12 hours		MACHINE STAND Optional SD-700	

AIR - COOLED				
Water Temp ° F.	50°	70°	90°	
Air Temp ° F.	70°	803	770	726
	80°	684	645	608
	90°	573	567	509

UTILITY CONSUMPTION				
Model Number	Approximate Electrical		KWH per 100 lbs.	
	90/70	70/50	90/70	70/50
DCM-750BAF	1481W	1449W	6.3	4.3
DCM-750BWF	1481W	1449W	6.3	4.3

WATER - COOLED				
Water Temp ° F.	50°	70°	90°	
Air Temp ° F.	70°	744	719	708
	80°	696	684	673
	90°	662	654	640

SPECIFICATIONS				
Model Number	Condenser	Amperage	Min Circuit Ampacity	Shipping Weight
DCM-750BAF	Air-Cooled	20.4	20	420 lbs.
DCM-750BWF	Water-Cooled	16.3	20	420 lbs.
SD-700	N/A	N/A	N/A	165 lbs.

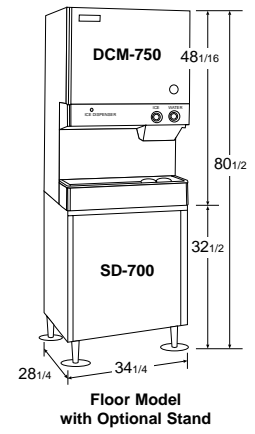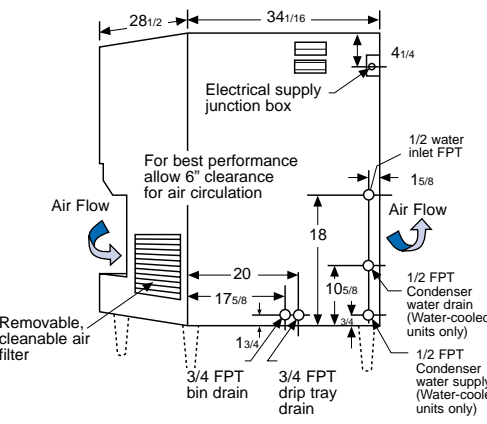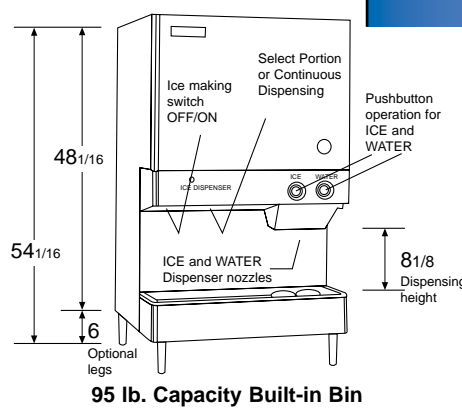

We reserve the right to change specifications without notice.

© HOSHIZAKI AMERICA, INC.