


HOSHIZAKI

Series

F1001M_H-C
Item # 13107 4/04

F-1001M_H-C SERIES


SLIM-LINE MODULAR CUBELET




B-300




B-500



B-700



B-800




B-900



F-1001MAH-C Flaker
Shown on Optional
B-700 Bin

F-1001MAH-C
Air-Cooled
F-1001MWH-C
Water-Cooled
F-1001MRH-C
Remote Air-Cooled

ICEMAKER DIMENSION	
Width x Depth x Height	
F-1001M_H-C	
22 x 27 ^{3/8} x 25 ^{15/16} "	
DIMENSION BY BIN SIZE	
Width x Depth x Height	
B-300	22 x 32 ^{1/2} x 71 ^{15/16} "
B-500	30 x 32 ^{1/2} x 71 ^{15/16} "
B-700	44 x 32 ^{1/2} x 71 ^{15/16} "
B-800	48 x 32 ^{1/2} x 71 ^{15/16} "
B-900	52 x 32 ^{1/2} x 71 ^{15/16} "

- Durable stainless steel exterior
- Up to 860 lbs. of ice production per 24 hours
- CleanCycle12® system 
- 15 minute flush cycle every 12 hours
- Removes sediment
- Cleaner ice
- Longer life and easy maintenance



Reliability is a beautiful thing™

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

1-800-438-6087

FAX 1-800-345-1325


TEL 770-487-2331

www.hoshizaki.com



SLIM-LINE MODULAR CUBELET

- F-1001MAH-C (AIR-COOLED)
- F-1001MWH-C (WATER-COOLED)
- F-1001MRH-C (REMOTE AIR-COOLED)



■ Up to 860 lbs. of ice production per 24 hours

STAINLESS STEEL
INTERNAL AUGER
R-404 REFRIGERANT

SERVICE
Panels easily removed and all components accessible for service.
Removable/cleanable air filters.



WARRANTY

TWO YEAR - Parts & Labor on entire machine.
FIVE YEAR - Parts on: Compressor, Air-Cooled Condenser Coil.
Warranty valid in United States, Canada, Puerto Rico, & U.S. Territories.
Contact Factory for Warranty in other Countries.

STORAGE BINS

- B-300 - 300 lb. Application Capacity (260 lb. ARI-Rated Capacity Bin)
- B-500 - 500 lb. Application Capacity (360 lb. ARI-Rated Capacity Bin)
- B-700 - 700 lb. Application Capacity (550 lb. ARI-Rated Capacity Bin)
- B-800 - 800 lb. Application Capacity (600 lb. ARI-Rated Capacity Bin)
- B-900 - 900 lb. Application Capacity (660 lb. ARI-Rated Capacity Bin)
- B-1200 - 1200 lb. Application Capacity
- B-1500 - 1500 lb. Application Capacity

OPERATING LIMITS

Ambient Temp Range 45 - 100°F
Water Temp Range 45 - 90°F
Voltage Range 187-253V
Water Pressure 10 - 113 psig

ELECTRICAL & PLUMBING

208-230V/60/1
(3 wire with dedicated neutral for 115V)
3/8" OD copper or equivalent independent water supply
3/4" independent drain connection

Clean Cycle 12®: 15 minute flush cycle every 12 hours to ensure bearings longer life

AIR - COOLED

Water Temp ° F.		50°	70°	90°
Air Temp ° F.	70°	860	820	790
	80°	765	735	710
	90°	680	665	635

WATER - COOLED

Water Temp ° F.		50°	70°	90°
Air Temp ° F.	70°	790	760	750
	80°	735	720	710
	90°	695	685	670

REMOTE AIR - COOLED



Water Temp ° F.		50°	70°	90°
Air Temp ° F.	70°	840	810	790
	80°	765	745	720
	90°	700	695	660

UTILITY CONSUMPTION


Model Number	Approximate Electrical		KWH per 100 lbs.		Condenser Water (gal./100 lbs.)	
	90/70	70/50	90/70	70/50	90/70	70/50
F-1001MAH-C	1760W	1715W	6.4	4.8	NA	NA
F-1001MWH-C	1265W	1264W	4.3	3.8	72	34
F-1001MRH-C	1605W	1610W	5.5	4.6	NA	NA

SPECIFICATIONS


Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
F-1001MAH-C	Air-Cooled	8.1	15	210 lbs.
F-1001MWH-C	Water-Cooled	7.2	15	210 lbs.
F-1001MRH-C	Remote Air-Cooled	10.2	15	210 lbs.

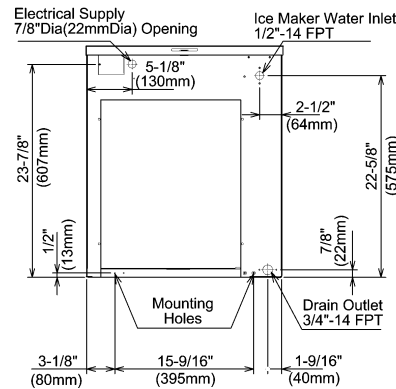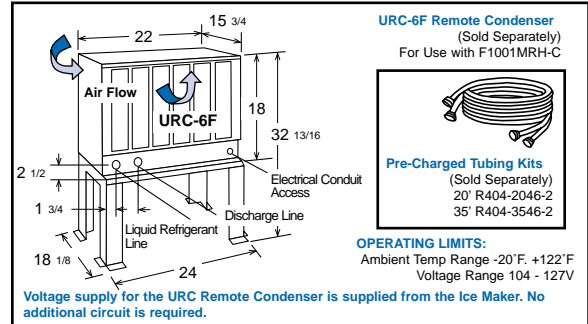


AIR-COOLED UNIT




ICE DROP ZONE

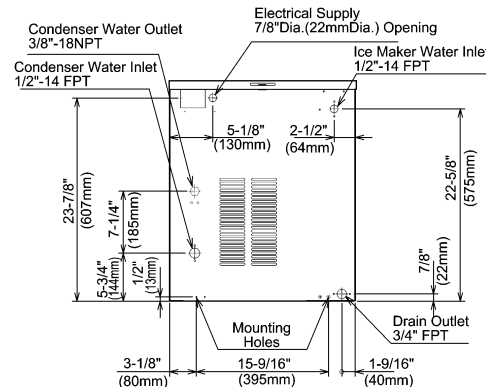


WATER-COOLED UNIT



SIDE VIEW

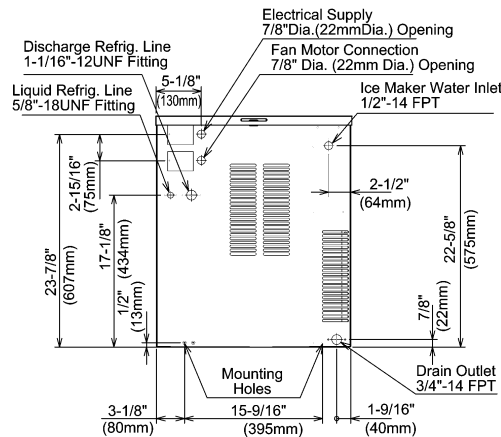

REMOTE AIR-COOLED UNIT



FRONT VIEW