

# HOSHIZAKI

## Series

F801M\_H  
Item # 13037 05/04

F-801M\_H SERIES

SLIM-LINE MODULAR FLAKER




F-801MAH Flaker  
Shown on Optional  
B-500 Bin


F-801MAH  
Air-Cooled  
F-801MWH  
Water-Cooled




B-300




B-500



B-700




B-800



B-900

<b>ICEMAKER DIMENSION</b>	
Width x Depth x Height	
<b>F-801M_H</b>	
22 x 27 <sup>3/8</sup> x 25 <sup>15/16</sup> "	
<b>DIMENSION BY BIN SIZE</b>	
Width x Depth x Height	
<b>B-300</b>	22 x 32 <sup>1/2</sup> x 71 <sup>15/16</sup> "
<b>B-500</b>	30 x 32 <sup>1/2</sup> x 71 <sup>15/16</sup> "
<b>B-700</b>	44 x 32 <sup>1/2</sup> x 71 <sup>15/16</sup> "
<b>B-800</b>	48 x 32 <sup>1/2</sup> x 71 <sup>15/16</sup> "
<b>B-900</b>	52 x 32 <sup>1/2</sup> x 71 <sup>15/16</sup> "

- Durable stainless steel exterior
- Up to 823 lbs. of ice production per 24 hours
- CleanCycle12® system 
- 15 minute flush cycle every 12 hours
- Removes sediment
- Cleaner ice
- Longer life and easy maintenance

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

1-800-438-6087

FAX 1-800-345-1325

TEL 770-487-2331

www.hoshizaki.com



Reliability is a beautiful thing™

SLIM-LINE MODULAR FLAKER

F-801MAH (AIR-COOLED)

■ Up to 823 lbs. of ice production per 24 hours

F-801MWH (WATER-COOLED)



<b>WARRANTY</b> TWO YEAR - Parts & Labor on entire machine. FIVE YEAR - Parts on: Compressor, Air-Cooled Condenser Coil.	<b>STAINLESS STEEL</b> <b>INTERNAL AUGER</b>	<b>SERVICE</b> Panels easily removed and all components accessible for service. Removable/cleanable air filters.
	<b>R-404 REFRIGERANT</b>	

Warranty valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact Factory for Warranty in other Countries.

**STORAGE BINS**

- B-300 - 300 lb. Application Capacity (260 lb. ARI-Rated Capacity Bin)
- B-500 - 500 lb. Application Capacity (360 lb. ARI-Rated Capacity Bin)
- B-700 - 700 lb. Application Capacity (550 lb. ARI-Rated Capacity Bin)
- B-800 - 800 lb. Application Capacity (600 lb. ARI-Rated Capacity Bin)
- B-900 - 900 lb. Application Capacity (660 lb. ARI-Rated Capacity Bin)
- B-1200 - 1200 lb. Application Capacity
- B-1500 - 1500 lb. Application Capacity

**OPERATING LIMITS**

Ambient Temp Range	45 - 100°F
Water Temp Range	45 - 90°F
Voltage Range	104-127V
Water Pressure	10 - 113 psig

**ELECTRICAL & PLUMBING**

- 115V/60/1
- 20 amp max fuse/HACR Breaker Size
- 3/8" OD copper or equivalent independent water supply
- 3/4" Independent drain connection

**Clean Cycle 12**®: 15 minute flush cycle every 12 hours to ensure bearings longer life



AIR - COOLED				
Water Temp ° F.		50°	70°	90°
Air Temp ° F.	70°	823	786	748
	80°	711	677	644
	90°	613	599	555

WATER - COOLED				
Water Temp ° F.		50°	70°	90°
Air Temp ° F.	70°	720	693	677
	80°	661	646	630
	90°	616	605	587


UTILITY CONSUMPTION						
Model Number	Approximate Electrical		KWH per 100 lbs.		Condenser Water (gal./100 lbs.)	
	90/70	70/50	90/70	70/50	90/70	70/50
F-801MAH	1131W	1089W	4.5	3.2	NA	NA
F-801MWH	1078W	1076W	4.3	3.6	60	31

SPECIFICATIONS				
Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
F-801MAH	Air-Cooled	13.3	20	205 lbs.
F-801MWH	Water-Cooled	11.5	20	205 lbs.


Optional: Cubelet-Ice making conversion kit

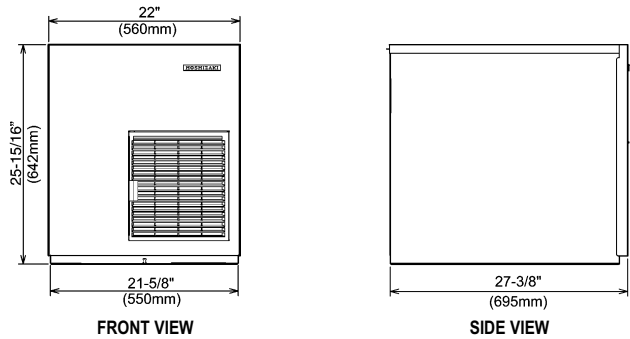

ICE DROP ZONE

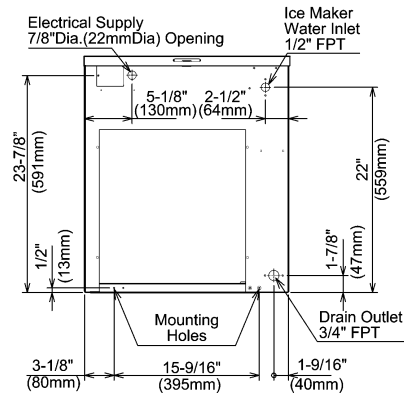

AIR-COOLED UNIT

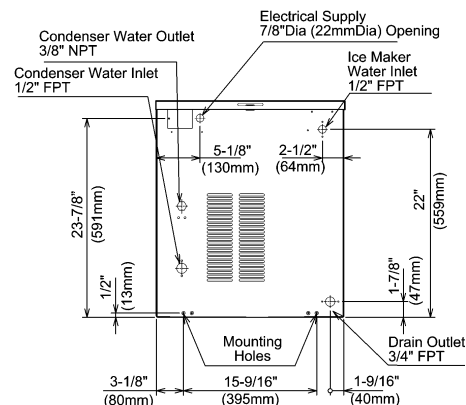

WATER-COOLED UNIT

We reserve the right to change specifications without notice.

© HOSHIZAKI AMERICA, INC.