


Hoshizaki

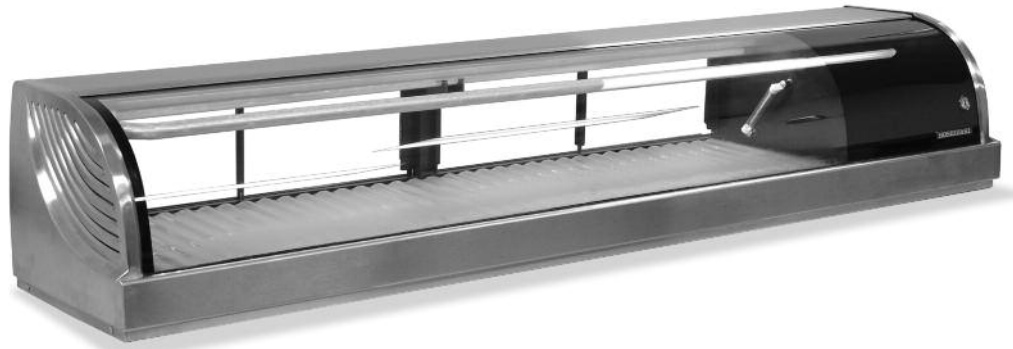

H

hoshizaki

HNC SERIES COUNTERTOP REFRIGERATED DISPLAY CASE

HNC-120BA-R(L)-S
HNC-150BA-R(L)-S
HNC-180BA-R(L)-S
HNC-210BA-R(L)-S

- Right or left handed
- Right or left handed
- Right or left handed
- Right or left handed


REFRIGERATED DISPLAY CASE

| Model | HNC-120 | HNC-150 | HNC-180 | HNC-210 |
|-------------------------------|--|---------------------|---------------------|---------------------|
| AC Supply Voltage | 1 Phase 115V 60Hz | | | |
| Power Supply Capacity | 0.47KVA (4.7A) | | | |
| Rated Amperage | 3.2A | | | |
| Starting Amperage | 13A | | | |
| Electric Consumption | 195W | | | |
| Saturation Temperature | Approximately 39°F (Ambient Temp. 80°F, No Load) | | | |
| Net Capacity | 1.48ft ³ | 2.01ft ³ | 2.54ft ³ | 3.07ft ³ |
| Ambient Temperature | 50 - 80° F | | | |
| Voltage Variation | Rated Voltage ± 10% | | | |
| Exterior Dimensions (W)(D)(H) | 47.2" 13.6" 11" | 59.1" | 70.9" | 82.7" |
| Interior Dimensions (W)(D)(H) | 33.3" 11.3" 6.2" | 45.1" | 56.9" | 68.7" |
| Exterior | Clear Glass, ABS Plastic, PVC Plastic, Stainless Steel | | | |
| Interior | Clear Glass, ABS Plastic, Stainless Steel | | | |
| Refrigeration System | Convection Cooling | | | |
| Sliding Door | 2 Pieces | 4 Pieces | | |
| Plate Space (Top of HNC) | 5.6" for food plate to rest upon top of case | | | |
| Shipping Weight (Lbs.) | 86 | 101 | 117 | 132 |
| Shipping Dimensions (W)(D)(H) | 51.2" 16.9" 18.6" | 63" | 74.8" | 86.6" |
| Accessories | 3 Pieces | 4 Pieces | 5 Pieces | 6 Pieces |
| Food Mount Plug | 4 Pieces | 4 Pieces | 4 Pieces | 4 Pieces |
| Vinyl Hose Joint | 1 Piece | 1 Piece | 1 Piece | 1 Piece |
| | 2 Pieces | 2 Pieces | 2 Pieces | 2 Pieces |

*Refrigerated Display Case - Not for overnight storage




HNC-120BA-L(R)-S
W x D x H
47.2" x 13.6" x 11"

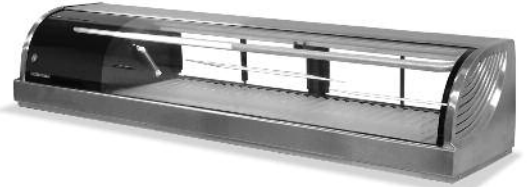

HNC-150BA-L(R)-S
W x D x H
59.1" x 13.6" x 11"



HNC-180BA-L(R)-S
W x D x H
70.9" x 13.6" x 11"

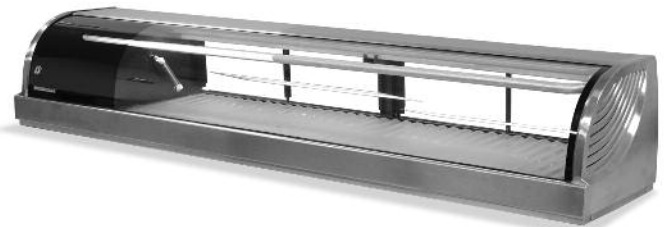

HNC-210BA-L(R)-S
W x D x H
82.7" x 13.6" x 11"

ELECTRICAL/HNC SERIES-STAINLESS STEEL

- I115V60/1

OPERATING LIMITS

- Ambient Temp Range 50 - 80°F
- Voltage Range 104 - 126V
- Saturation Temp 39°F

SERVICE

- Removable/cleanable air filters



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.

