

# KML-631M\_H

## LOW-PROFILE MODULAR CRESCENT CUBER

Item # \_\_\_\_\_



Project: \_\_\_\_\_

Qty: \_\_\_\_\_  
 \*AutoCad available on KCL

KML-631M\_H  
 1/13  
 Item # 13192

### CUBER DIMENSIONS W x D x H




**KML-631M\_H**  
 30 x 27<sup>3/8</sup> x 26




**KML-631MAH**  
 Air-Cooled  
 Shown on an optional  
 B-500

**KML-631MWH**  
 Water-Cooled

**KML-631MRH**  
 Remote Air-Cooled

- Up to 636 lbs. of ice production per 24 hours
- Durable stainless steel exterior
- Individual crescent cube
- Protected by H-GUARD Plus Antimicrobial Agent 
- CycleSaver® Design 
- EverCheck® alert system 
- Stainless steel evaporator
- Removable air filters (Air-cooled models only)
- R-404A Refrigerant

### KM CUBE DIMENSIONS



### Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

- Three Year** - Parts & Labor on entire machine.
- Five Year** - Parts & Labor on: Evaporator
- Five Year** - Parts on: Compressor, air-cooled condenser coil.



# HOSHIZAKI

# KML-63IM\_H LOW-PROFILE MODULAR CRESCENT CUBER

**DIMENSIONS**  
W x D x H  
**KML-63IM\_H**  
30 x 27<sup>3/8</sup> x 26

- Air-cooled
- Water-cooled
- Remote Air-cooled

### AIR-COOLED

Water Temp ° F.	50°	70°	90°
Air Temp ° F.			
70°	575	552	515
80°	558	522	481
90°	552	<b>497</b>	457

### WATER-COOLED

Water Temp ° F.	50°	70°	90°
Air Temp ° F.			
70°	632	631	593
80°	632	631	572
90°	631	<b>630</b>	579

### REMOTE AIR-COOLED

Water Temp ° F.	50°	70°	90°
Air Temp ° F.			
70°	636	622	578
80°	626	604	545
90°	622	<b>589</b>	535

### UTILITY CONSUMPTION

Model Number	Ice Production Per Cycle		KWH per 100 LBS. 90/70	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.
	Lbs.	Cubes			
KML-631MAH	9.0	480	6.2	26.0	N/A
KML-631MWH	9.7	480	4.4	24.8	119
KML-631MRH	9.4	480	5.3	24.0	N/A

### SPECIFICATIONS

Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
KML-631MAH	Air-Cooled	7.6	20 A	220 lbs.
KML-631MWH	Water-Cooled	6.8	20 A	217 lbs.
KML-631MRH	Remote Air-Cooled	7.8	20 A	220 lbs.

### STORAGE BINS

Model Number	Application Capacity	ARI-Rated Capacity
B-250	250 lbs.	230 lbs.
B-500	500 lbs.	360 lbs.
B-700	700 lbs.	550 lbs.
B-800	800 lbs.	600 lbs.
B-900	900 lbs.	660 lbs.
B-1150	1150 lbs.	N/A
B-1300	1275 lbs.	N/A
B-1500	1500 lbs.	N/A
B-1650	1605 lbs.	N/A


### ELECTRICAL & PLUMBING/KML-63IM\_H

- 208-230/60/1 (3 wire with dedicated neutral for 115V)
- 20 Amp Max Fuse/HACR Breaker Size
- 3/8" OD copper or equivalent independent potable water supply
- 3/4" FPT independent drain connection




© HOSHIZAKI AMERICA, INC.


618 Hwy. 74 S., Peachtree City, GA 30269




FRONT VIEW




SIDE VIEW




ICE DROP ZONE

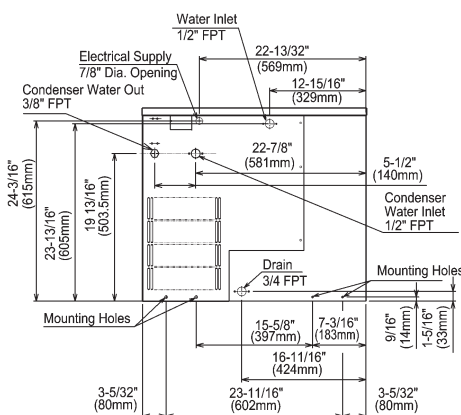

WATER-COOLED UNIT

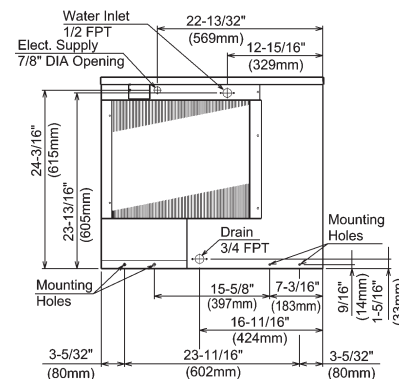


AIR-COOLED UNIT

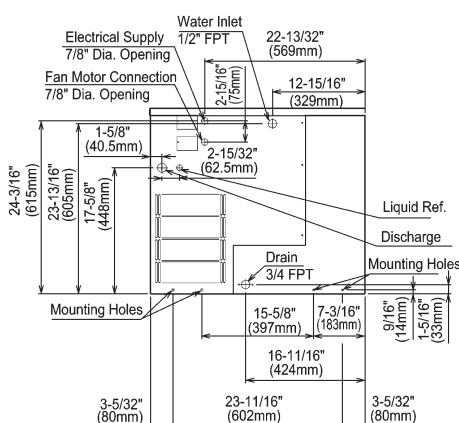

REMOTE AIR-COOLED UNIT

**URC-9F Remote Condenser** (Sold Separately)  
For Use with KML-631MRH

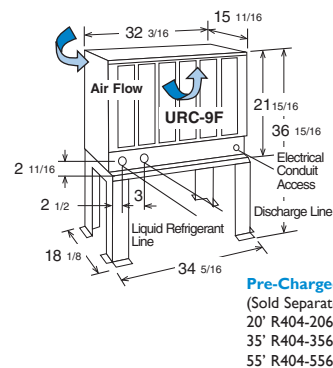

**Pre-Charged Tubing Kits**  
(Sold Separately)  
20' R404-2068-2  
35' R404-3568-2  
55' R404-5568-2

Voltage supply for the URC Remote Condenser is supplied from the Ice Maker. No additional circuit is required.

### OPERATING LIMITS

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 187 - 253V

### SERVICE

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filters (Air-cooled models only)

### CONDENSING UNIT

- Voltage Range 104 - 127V
- Ambient Temp Range -22 - 122°F

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.

