

# F-1001M\_H-C

## MODULAR CUBELET ICE MACHINE

### SLIM-LINE SERIES

Item # \_\_\_\_\_

Project: \_\_\_\_\_

Qty: \_\_\_\_\_

\*AutoCad available on KCL

F-1001M\_H-C

4/13

Item # 13107

#### CUBELET DIMENSIONS

W x D x H

**F-1001M\_H-C**  
22 x 27<sup>3/8</sup> x 25<sup>15/16</sup>




B-300




B-500



B-700




B-800



B-900

Also available on Large Bins:  
B-1150SS  
B-1300SS  
B-1500SS  
B-1650SS

#### CUBELET DIMENSIONS



#### F-1001MAH-C


Air-Cooled  
Shown on an optional  
B-700

#### F-1001MWH-C

Water-Cooled

#### F-1001MRH-C

Remote Air-Cooled

- Up to 910 lbs. of ice production per 24 hours
- Durable stainless steel exterior
- CleanCycle I2® Design 
- 15 minute flush cycle every 12 hours
- Removes sediment
- Cleaner ice
- Longer life and easy maintenance
- R-404A Refrigerant



ISO 9001-15014:2001

#### Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

**Three Year** - Parts & Labor on entire machine. (Serial numbers Vxxxxxj and after.)

**Five Year** - Parts on Compressor, air-cooled condenser coil.



# HOSHIZAKI

## F-100IM\_H-C CUBELET ICE MACHINE SLIM-LINE MODULAR SERIES

**DIMENSIONS**  
W x D x H  
**F-100IM\_H-C**  
22 x 27<sup>3/8</sup> x 25<sup>15/16</sup>

- Air-cooled
- Water-cooled
- Remote Air-cooled

### AIR-COOLED

Water Temp° F.	50°	70°	90°
Air Temp° F. 70°	910	860	830
Air Temp° F. 80°	800	770	740
Air Temp° F. 90°	630	<b>680</b>	660

### WATER-COOLED

Water Temp° F.	50°	70°	90°
Air Temp° F. 70°	790	760	750
Air Temp° F. 80°	735	720	710
Air Temp° F. 90°	695	<b>685</b>	670

### REMOTE AIR-COOLED

Water Temp° F.	50°	70°	90°
Air Temp° F. 70°	840	810	790
Air Temp° F. 80°	765	745	720
Air Temp° F. 90°	700	<b>695</b>	660

### UTILITY CONSUMPTION

Model Number	KWH per 100 LBS. 90/70	Potable Water Gal. per 100 lbs.
F-1001MAH-C	5.4	12.0
F-1001MWH-C	4.3	12.0
F-1001MRH-C	5.5	12.0

### SPECIFICATIONS

Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
F-1001MAH-C	Air-Cooled	8.1	15	205 lbs.
F-1001MWH-C	Water-Cooled	7.2	15	210 lbs.
F-1001MRH-C	Remote Air-Cooled	7.2	15	210 lbs.

### STORAGE BINS

Model Number	Application Capacity	ARI-Rated Capacity
B-300	300 lbs.	260 lbs.
B-500	500 lbs.	360 lbs.
B-700	700 lbs.	550 lbs.
B-800	800 lbs.	600 lbs.
B-900	900 lbs.	660 lbs.
B-1150	1150 lbs.	N/A
B-1300	1275 lbs.	N/A
B-1500	1490 lbs.	N/A
B-1650	1605 lbs.	N/A


### ELECTRICAL & PLUMBING/F-100IM\_H-C

- 208-230V/60/1 (3 wire with dedicated neutral for 115V)
- 3/8" OD copper or equivalent independent potable water supply
- 3/4" FPT independent drain connection




© HOSHIZAKI AMERICA, INC.


618 Hwy. 74 S., Peachtree City, GA 30269




FRONT VIEW




SIDE VIEW

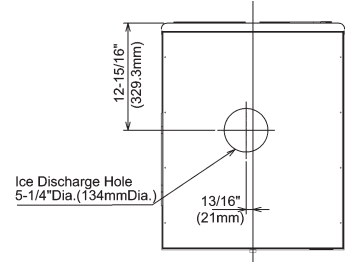


ICE DROP ZONE

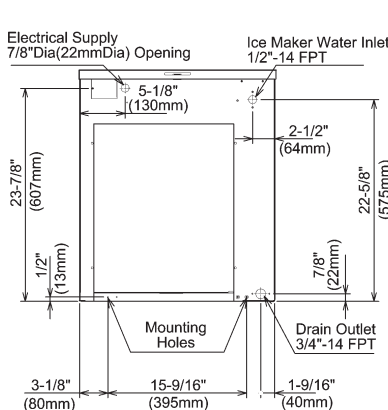

AIR-COOLED UNIT

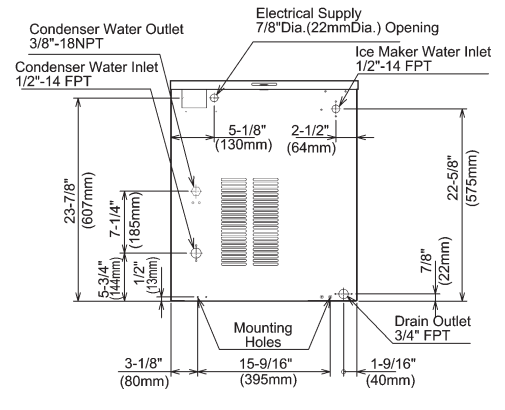


WATER-COOLED UNIT

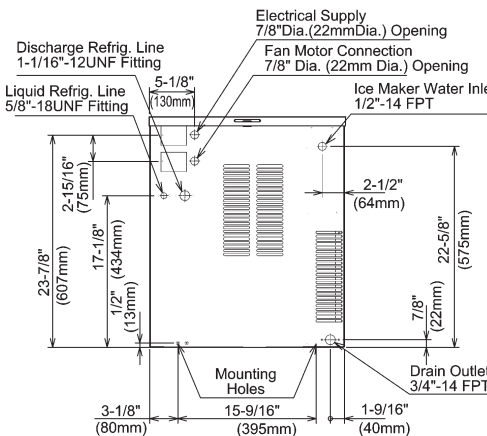

REMOTE AIR-COOLED UNIT

URC-5F Remote Condenser (Sold Separately)  
For Use with F-1001MRH-C

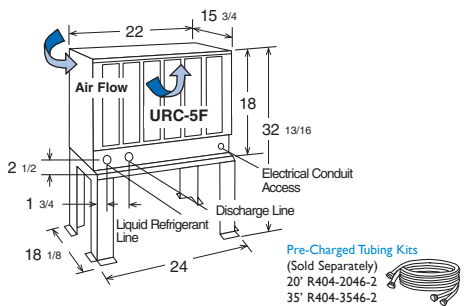

Voltage supply for the URC Remote Condenser is supplied from the Ice Maker. No additional circuit is required.

### OPERATING LIMITS

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 187 - 253V

### SERVICE

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filter. (Air-Cooled model only)

